

ASYMMETRIC/SYMMETRIC SPINNAKER, CODE C AND CODE O MEASUREMENT FORM

We require the following information and measurements to enable us to ensure a perfect fit for your new sail. Please note that if asked for max dimensions or max hoist, we will deduct a suitable amount for stretch. Do not measure sails using a rope. It is advisable to use a long fiberglass tape.

CUSTOMER NAME:

BOAT TYPE: RIG TYPE: FRACTIONAL OR MASTHEAD (circle)

RIG MEASUREMENTS

Attach tape measure to spinnaker halyard and hoist.

1. Height of spinnaker foretriangle (I-Spin)

Take measurement from height of spinnaker block at mast to side decks.

 m

2. Spinnaker max luff length (A)

Take measurement from height of spinnaker block to TACK point on spinnaker pole (or bow if not using a pole).

 m

Now drop tape measure ready for deck level measurements.

3. Base of foretriangle (J-Spin)

Distance from front of mast to forestay attachment to deck.

 m

4. Sheeting distance (C)


Distance from spinnaker tack point on pole/deck to aft sheeting blocks for spinnaker sheet.

 m

7. If the sail is to be furled, what brand and model of furler will be used?

OPTIONS (circle)

- Launch Turtle Bag Yes/No
- Spinnaker snuffer/sock Yes/No
- Spinnaker sheets Yes/No

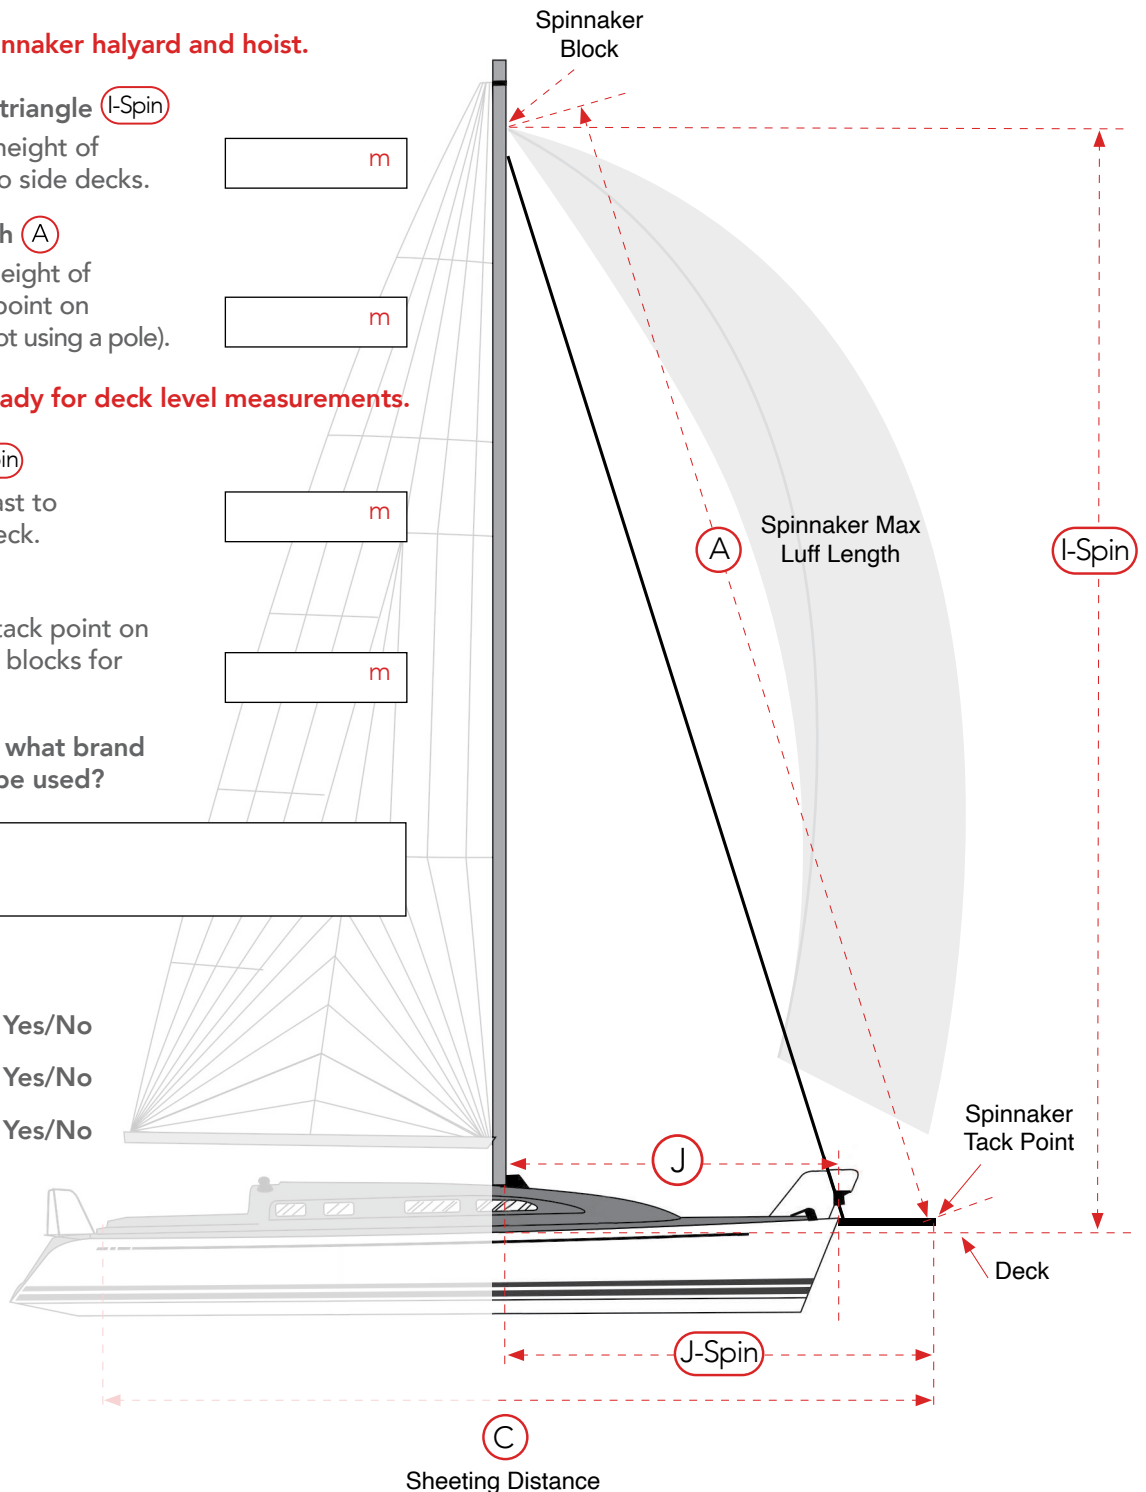

Sheeting Distance